# SupaSecure TSO08 CERTIFIED LETTERPLATE ENHANCED SECURITY



Hardware that starts with you.



# SupaSecure **TSO08 CERTIFIED LETTERPLATE** ENHANCED SECURITY

for composite, timber, aluminium and UPVC doors



TS008 is an **enhanced security specification** for letterplates. It covers attack methods including fishing, ability to manipulate the door lock, removing posted items and forced removal of the letterplate

**MILA** 

**Clever security features** and simple installation.

### ON THE **INSIDE**

PatentedDesign Application no. GB2576184

# **TS008** Technology

Our new SupaSecure High Security Letterplate is TS008 certified, Secured by Design approved, Kitemarked, ADQ compliant and meets the requirements of the Postal Services Standard

## **ANTI-FISHING TECHNOLOGY**

Our patented anti-fishing fins operate with a smooth concertina action for clever, secure, restricted flap opening and a compact aesthetic



Integrated drainage channel stops water or condensation pooling, preventing corrosion

#### Mix & Match Choose from 5 colours for the internal side of your door





80° 45mm

**MILA** 

#### Secure

A restricted opening angle of 80° enables the TS008 letterplate to be accessible yet secure

0

**Fishing Deflection** 

to protect against fishing

An angled postal ramp designed into the aperture deflects items upwards

#### Slim

The compact design of the internal half of the letterplate projects just 45mm which looks discreet and allows the door to fully open





Effective weather sealing through a combination of external foam and internal nylon brushes

### ON THE OUTSIDE

# **SupaSecure** Stainless Steel

in six durable finishes, for a fully cordinated look

Beautifully designed in high quality stainless steel, the Supa Secure letterplate features a matching stainless steel frame and flap,

### **STAINLESS STEEL TECHNOLOGY**

and a concealed operating mechanism. 100kg flap pull test for enhanced security

Contemporary design with matching stainless steel flap and frame, Tested to 1,000 hours salt spray for a long lasting finish & has achieved a

#### Coordinated

Matching stainless steel frame and flap

#### **Beautiful**

Concealed flap-operating mechanism for a seamless design

#### Telescopic

61mm - 91mm with telescopic sleeve extender

#### Durable

Tested to BSEN 1670 Grade 5 achieving 480 hours salt spray. Real-life tested to more than twice the standard to 1056 hours salt spray

#### Reliable

Cycle tested to 20,000 cycles for operational

#### Strong


Achieved 100kg flap pull test for enhanced security

#### Intelligent

Flap opens fully to 180° without abrasion


### **Extreme Weather Sealing**

Tested to BS 6375-1 achieving 150 Pascals water penetration, withstanding 2 litres of water per

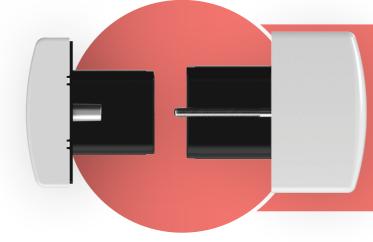

#### Mix & Match Choose from 6 stainless steel colours for the outside of your door







Polished Stainless

Polished Gold **PVD** Stainless

Stainless

Brushed





#### Simple Installation

- Ready to fit straight from the box to the door in one piece, no need to disassemble first
- Fits standard aperture no special fixings or routing required
- Fast fit it in under 2 minutes

**Brushed Gold PVD** Stainless Black Powder

White Powder Coated Stainless Coated Stainless




### **SupaSecure TSO08 CERTIFIED LETTERPLATE** ENHANCED SECUP

#### Part Numbers

	External Letterplate Polished Stainless	External Letterplate Polished Gold PVD Stainless	External Letterplate Brushed Stainless	External Letterplate Brushed Gold PVD Stainless	External Letterplate Black Powder Coated Stainless	External Letterplate White Powder Coated Stainless
Internal Letterplate Polished Chrome	TS008 PSS/CH	-	-	-	-	-
Internal Letterplate Polished Gold	-	TS008 GSS/G	-	-	-	-
Internal Letterplate Satin Silver	-	-	TS008 BSS/SS	-	-	-
Internal Letterplate Black	-	-	-	-	TS008 BLKSS/BLK	-
Internal Letterplate White	TS008 PSS/WHT	TS008 GSS/WHT	TS008 BSS/WHT	TS008 BGSS/WHT	TS008 BLKSS/WHT	TS008 WSS/WHT

Additional colour combinations available - please contact the Mila sales team on 01327 312 400

### **Technical Drawings**

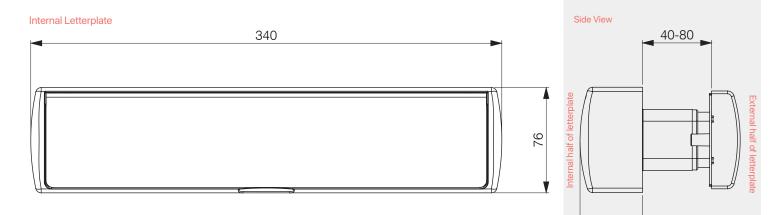

#### External Letterplate

16



**APERTURE SIZE** 

Fixing bolts supplied as standard

45

46



Hardware that starts with you.